MPS 250 D2 F4 30

145819

- Backward curved centrifugal impeller
- Swing out fan unit
- Sheet steel housing double-walled, 40 mm mineral wool
- IE3 motor outside the airflow, frequency controllable
- Smoke extract fan F400, 200 °C continuous operation
- With condensate and grease drain




to the product detail page

MPS 250 D2 F4 30

145819

FAN CURVES

Name	Value	Unit
Volume flow	1070.89	m³/h
Pressure	-211.38	Pa

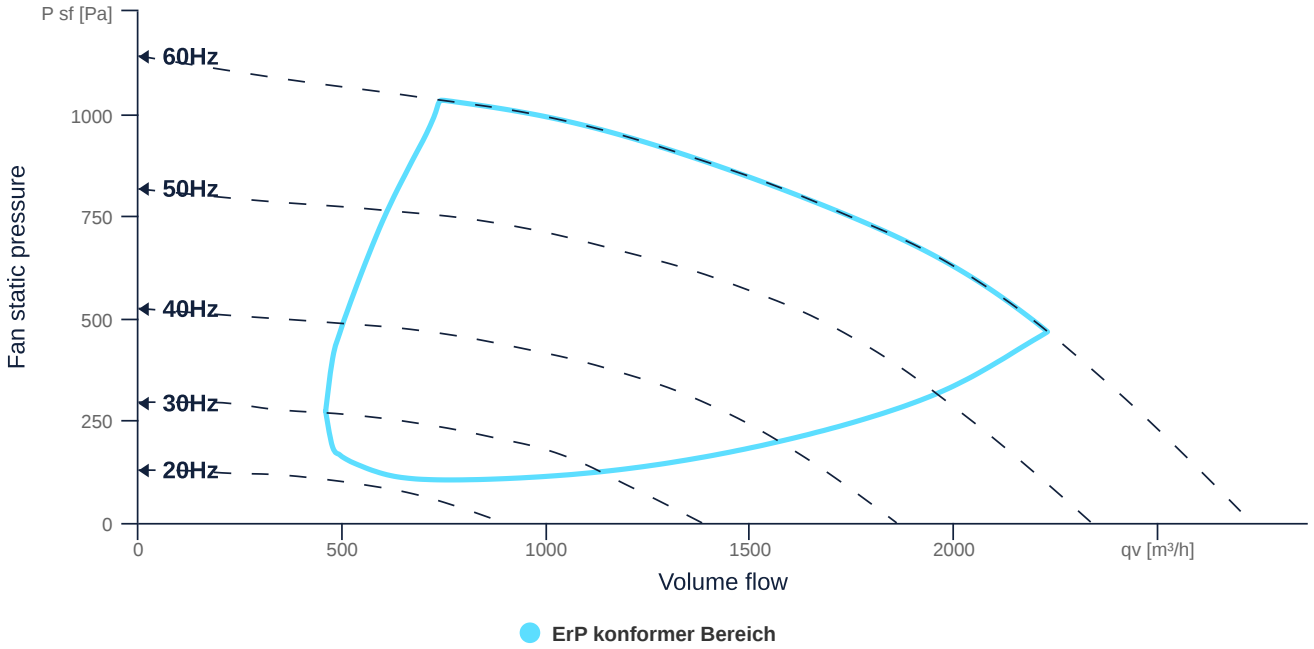

ruck Ventilatoren GmbH certifies that the fan range MPS shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and comply with the requirements of the AMCA Certified Ratings Program. / July 2026

F400

to the product detail page

MPS 250 D2 F4 30

145819

TECHNICAL SPECIFICATIONS

Name	Value	Unit	Formula symbol
Volume flow	1070	m³/h	q_{vcalc}
Pressure	-212	Pa	psf_{calc}
Fan pressure	22	Pa	pf
Fan static pressure	-212	Pa	psf
Current consumption Motor	0.5	A	Ie
Current consumption Electric	0	A	Ied
Electrical power consumption	76	W	Pe_K
Electrical power consumption	113	W	Ped_K
Frequency	23	Hz	frq
Rotation speed	1345	1/min	N
Total static efficiency	-83	%	etaFaPeK
Total speed controlled static efficiency	-56	%	etaFaPedK
Total efficiency	8	%	etatPeK
Total speed controlled efficiency	5	%	etatPedK
SFP (entire device)	256	W/(m³/s)	sfp_{device}
Sound power level inlet	63	dB(A)	LwA5
Sound power level outlet	63	dB(A)	LwA6
Sound power level housing radiation	55	dB(A)	LwA2

SOUND DATA

Sound power	mid-frequency tape										Unit	Formula symbol
	∑	63	125	250	500	1000	2000	4000	8000	16000		
suction	63	36	51	55	59	55	55	50	44	32	dB(A)	LwA5
blowout	63	37	51	54	56	57	59	51	44	30	dB(A)	LwA6
Casing break out	56	36	52	48	49	48	40	39	40	33	dB(A)	LwA2

SOUND PRESSURE LEVEL CALCULATOR

Name	Value	Unit
Enveloping surface	Halphsphere	
Distance	3	m

Sound pressure	NR	mid-frequency tape										Unit	Formula symbol
		∑	63	125	250	500	1000	2000	4000	8000	16000		
suction	40	46	19	34	37	42	37	37	32	27	15	dB(A)	LwA5
blowout	43	46	20	33	37	38	39	42	33	26	13	dB(A)	LwA6
Casing break out	32	38	19	35	31	31	30	23	21	23	16	dB(A)	LwA2

to the product detail page

MPS 250 D2 F4 30

145819

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA, AMCA		
Duct size	-		WxH_{duct}
Pipe connection size (DN)	DN250		DN
Rated voltage (entire device)	400	v	U_{rated}
Phases (entire device)	3~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Galvanized steel		mat_{casing}
Impeller material	Coated steel		$mat_{impeller}$
Weight	31.3	kg	m
Nominal air flow rate, nominal point m³/h	2152.8	m³/h	qv_{nom}
Nominal external pressure, static	519	Pa	$p_{s,nom}$
Fan type	Radial		Fan_{type}
Category / Installation situation	A		cat
Length	315	mm	
Width	592	mm	
Height	693	mm	

MAXIMAL DATA

Name	Value	Unit	Formula symbol
Max. power consumption (device)	756	w	$P_{ed,\ max}$
Max. operating current (device)	1.28	A	$I_{ed,\ max}$
Max. speed	3480	rpm	n_{max}
Max. stat. efficiency	46.4	p	η_{es}
Max. fan efficiency	50	p	η_{e}
Max. flowrate	2730	m³/h	$q_{v,\ max}$
Max. stat pressure	1130	Pa	$p_{sf,\ max}$
Max. medium temperature	200	°C	$T_{m,\ max}$
Max. environment temperature	50	°C	$T_{amb,\ max}$
Min. environment temperature	-20	°C	$T_{amb,\ min}$

to the product detail page

MPS 250 D2 F4 30

145819

MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		AC 3~		phase
Control type		frequency-controlled		$ctrl_{type}$
Installation type		IRM (In)		install
Isolation class		ISO F		ISO_{class}
Protection class		IP55		IP_{motor}
Is pole-changeable		No		polexch
Type of power supply		AC 3~		$pwrsup_{motor}$
Number of poles (1)		2.000000		$num\ poles_{w1}$
Connection	Δ	Y		$wiring_{w1}$
Connection (wiring 2)	Y			$wiring_{w2}$
Rated voltage	230	460	v	$U_{rated,\ f1}$
Rated voltage (wiring 2)	400		v	$U_{rated,\ f2}$
Rated current	2.06	1.07	A	$I_{rated,\ f1}$
Rated current (wiring 2)	1.19		A	$I_{rated,\ f2}$
Nominal power	550	550	w	P_a
Nominal power (wiring 2)	550		w	$P_{out,\ f2}$
Speed	2800	3440	rpm	n_{f1}
Speed (wiring 2)	2800		rpm	n_{f2}
Starting current	12.2	7.81	A	$I_{start,\ f1}$
Starting current (wiring 2)	7.02		A	$I_{start,\ f2}$
Efficiency	77.8	77	p	$\eta_{m,\ f1}$
Efficiency (wiring 2)	77.8		p	$\eta_{m,\ f2}$
Efficiency class	IE3	IE3		IE_{motor}
Min. temperature	-20	-20	°C	$T_{motor,\ min}$
Cos Phi	0.860000	0.840000		cos φ
UL-Certification motor		UL recognized		UL_{cert}

SMOKE EXTRACT DATA


Name	Value	Unit	Formula symbol
Maximum resistance temperature	400	°C	T_{fire}
Maximum resistance time	120.000000		t_{fire}
Fire resistance class	F 400 (120)		F_{class}
Snow load class	-		SL_{class}

to the product detail page

MPS 250 D2 F4 30

145819

CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

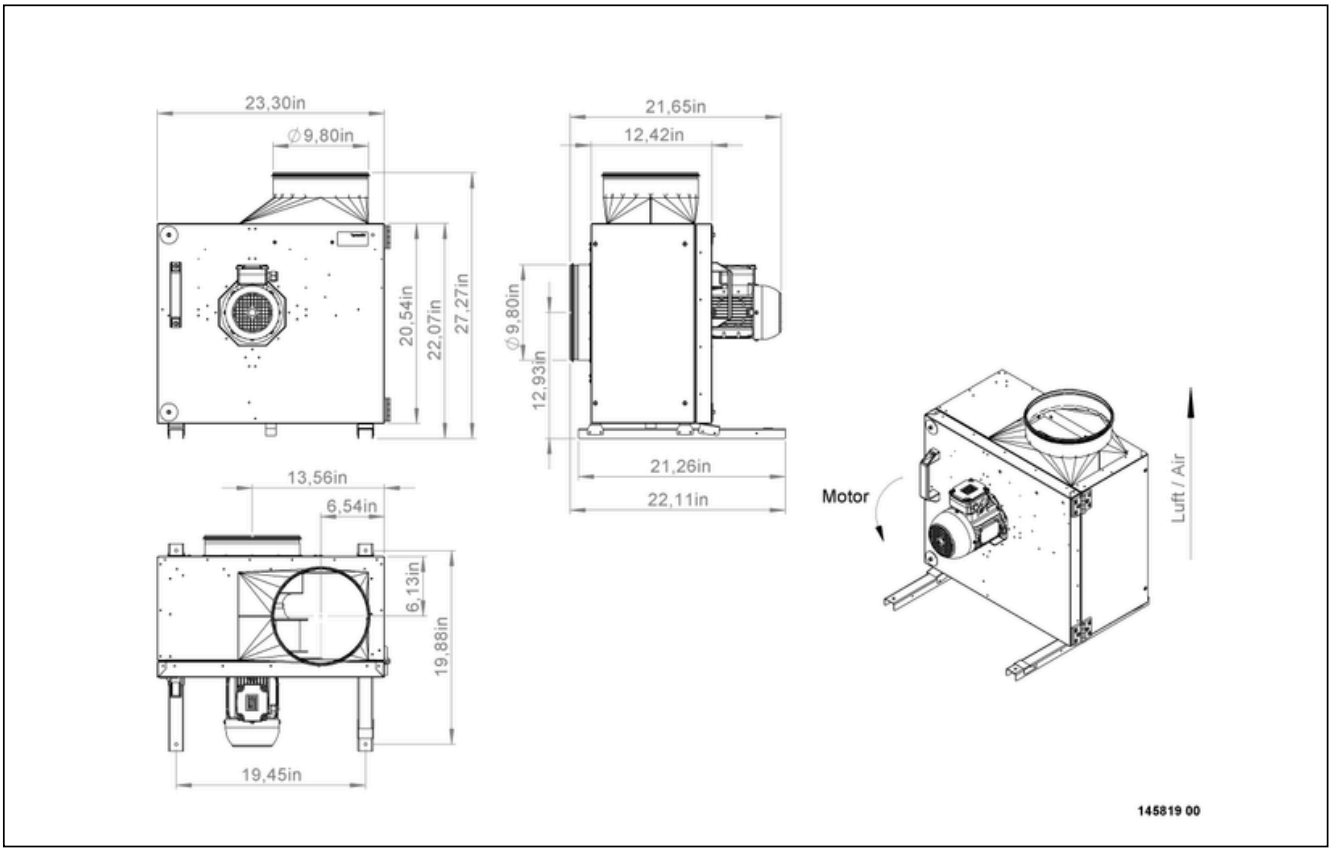


to the product detail page

MPS 250 D2 F4 30

145819

CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

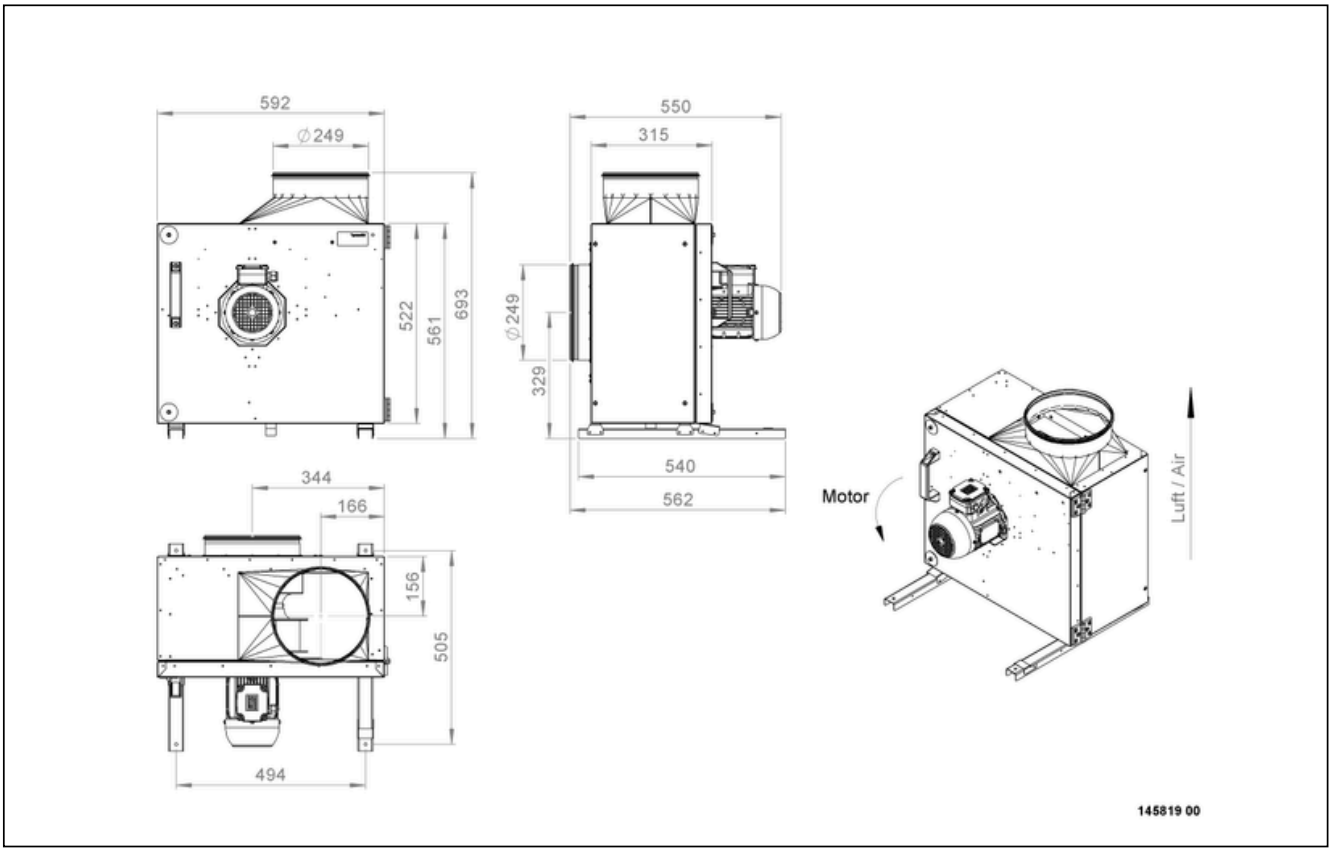


to the product detail page

MPS 250 D2 F4 30

145819

CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

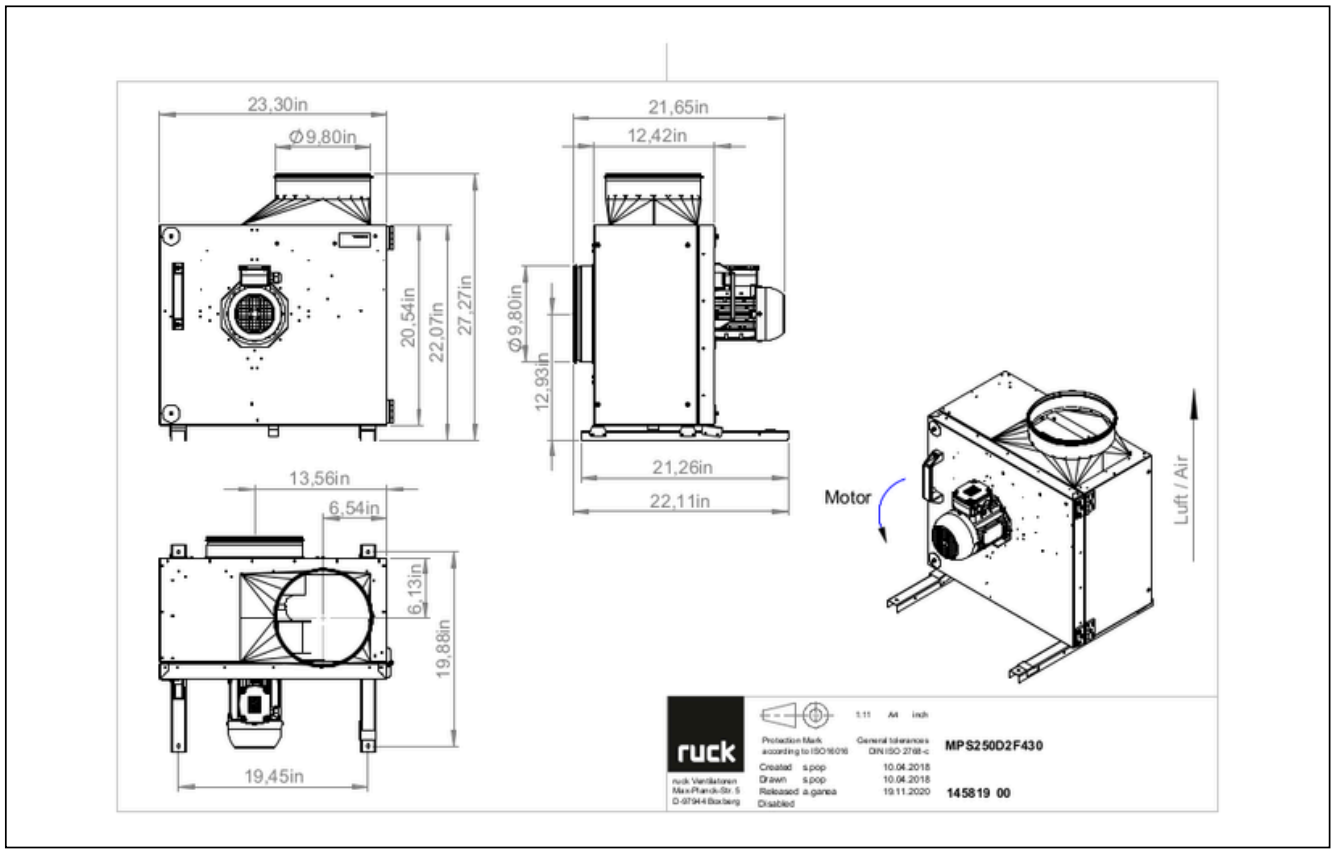


to the product detail page

MPS 250 D2 F4 30

145819

CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

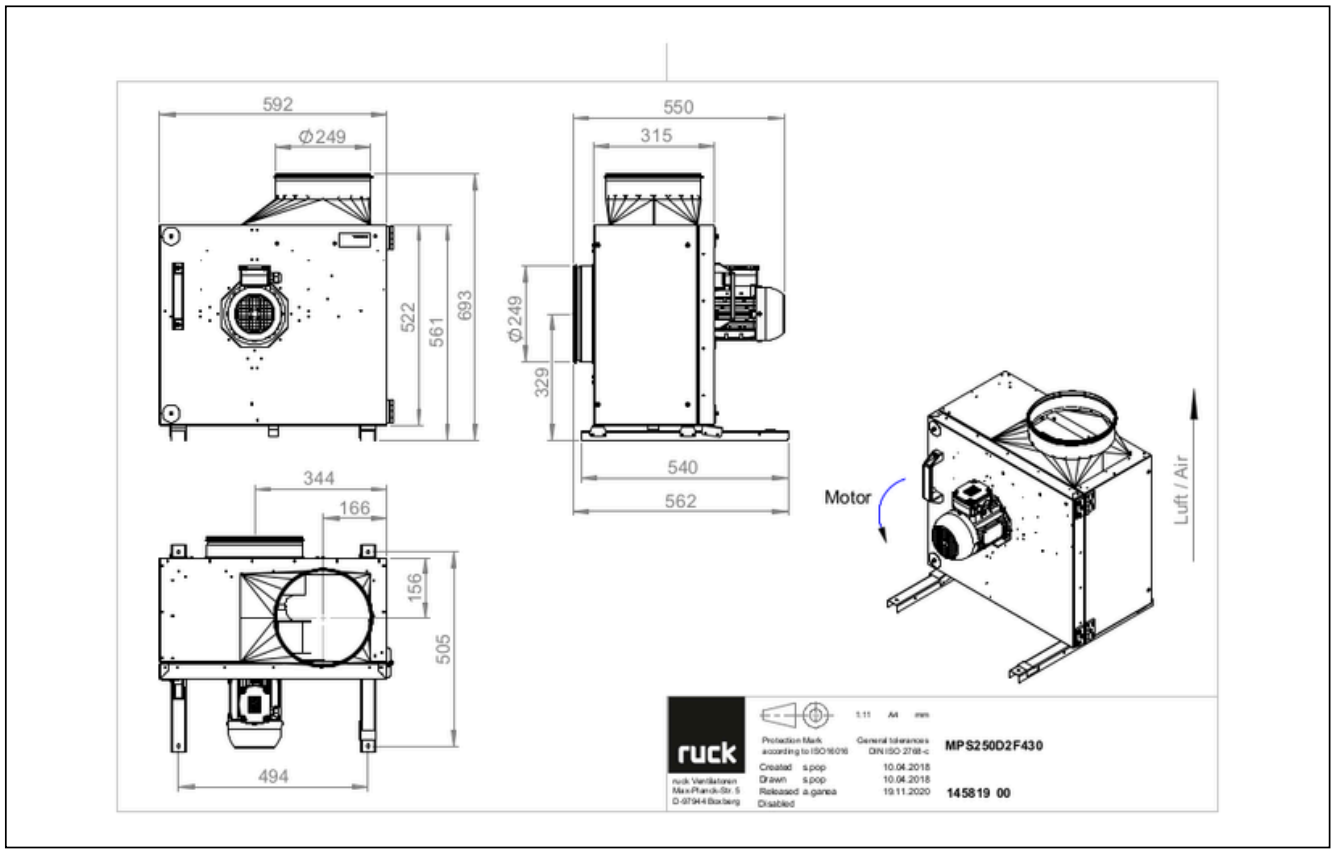


to the product detail page

MPS 250 D2 F4 30

145819

CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

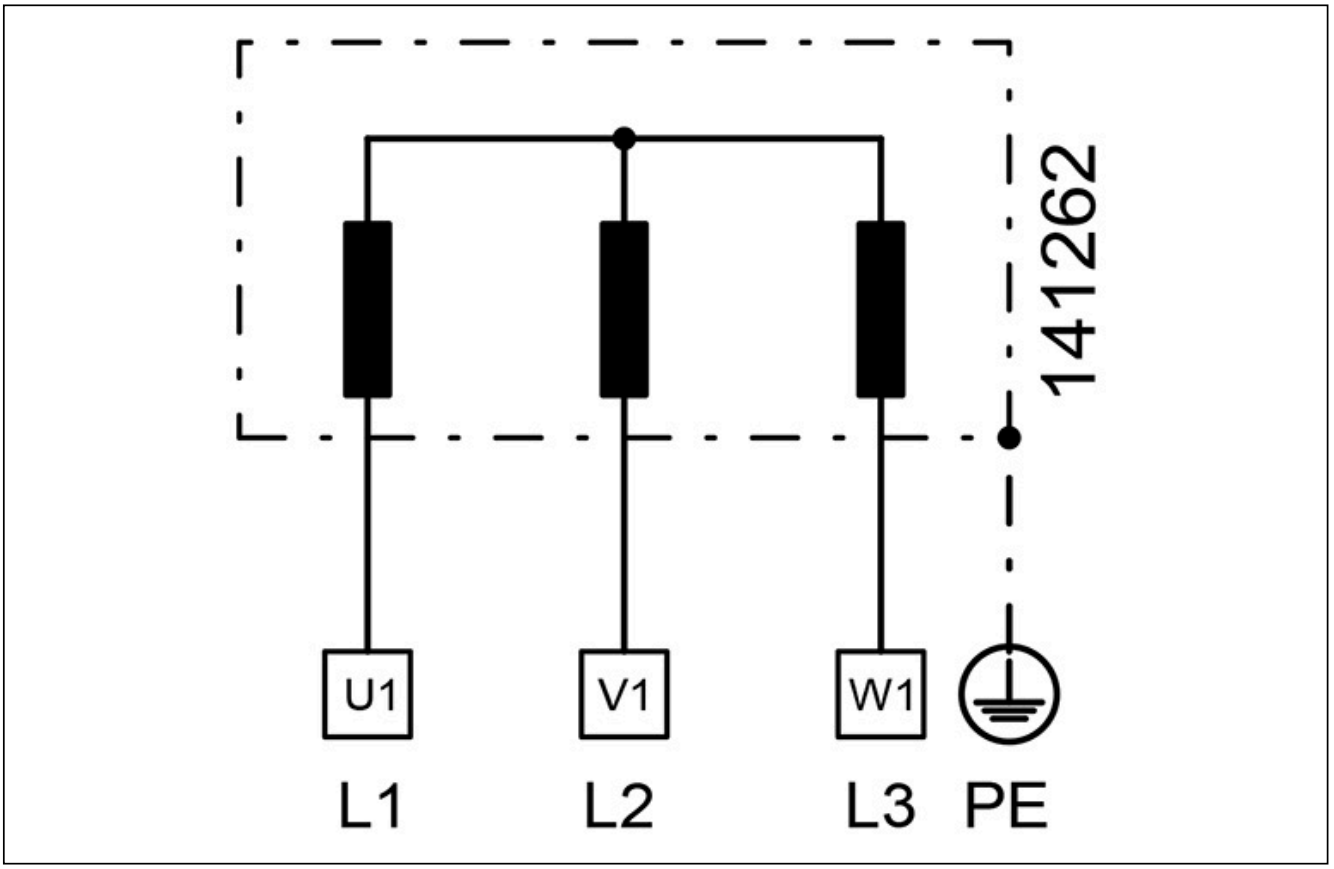

MECHANICAL ACCESSORIES

WSH MPS | 103661



- Weather protection hood for motor
- Galvanized steel sheet

WK MPS 07 | 127953



- Wall mounting bracket for box fan
- Galvanized steel sheet
- 1 Pack = 2 pieces


to the product detail page

MPS 250 D2 F4 30

145819

ELECTRICAL ACCESSORIES

GS 03 | 107633



- Device switch
- Umax = 400 V, Imax = 25 A
- Switching capacity 400 V 3~ = 7,5 kW
- Protection class IP 55

CON P1000 | 115259



- Constant pressure control
- Actual value display possible via optional control unit
- Output 0-10 V DC + FC enable + setpoint reached
- Pressure setting by means of decade switch

MTP 20 | 128146



- Potentiometer 10 kΩ
- Switching contact 1A/250V AC - 2,5A/12V DC
- Max. ambient temperature 50 °C

MS 01 | 140407



- Motor protection switch with Isolator switchfunktion
- Imax = 400 V, 50/60 Hz
- Max. 0.55 kW
- Protection class IP 55

FU 075 15 | 141848



- Frequency converter IP66
- Supply voltage 230 V 1~ 50/60 Hz
- Output voltage 0 - 230 V 3~
- Fire mode function (smoke extract fans)

FU 075 27 | 141870



- Frequency converter
- Supply voltage 400 V 3~ 50/60 Hz
- Output voltage 0 - 400 V 3~
- Fire mode function (smoke extract fans)

MTP 40 | 147359



- Potentiometer 10 kΩ
- Connection in terminal box
- Max. ambient temperature 50 °C
- PU: 20 pieces

SEN AIR | 148641



- Airflow and temperature transducer
- Measuring range temperature 0...+50 °C
- With adjustable switching threshold (air speed)
- Measuring range air velocity up to 20 m/s

MTP 50 | 168752



- Potentiometer with multifunction output
- 230 VAC ±10 % / 50-60 Hz
- Selectable output: 1-10 VDC / 2-20 mA / 10-100 % PWM
- Min. and max. output value adjustable

MTP 30 | 177381



- Stepped potentiometer 10 kΩ
- Step 1 + 2 settable 10 % - 100 % Vdc
- Step 3 100 % Vdc
- Supply voltage+10Vdc

to the product detail page